

## BR0.2板式换热器




### 概述

BR0.2型板式冷却器采用先进的人字形不锈钢换热板片，具有换热效率高、耐腐蚀、重量轻、易修易拆、便于增减换热面积、冷热介质不易混合及介质残留少、不易结垢等特点，是一种较理想的换热冷却设备。

### 外形尺寸

型号	BR0.2
板片外形尺寸	848x333x0.5
单片换热面积	0.2m <sup>2</sup>
板片波纹深厚	3.5mm
最大流量	85m <sup>3</sup> /h
工作压力	0.6MPa-1.6MPa
板片角孔尺寸	65mm

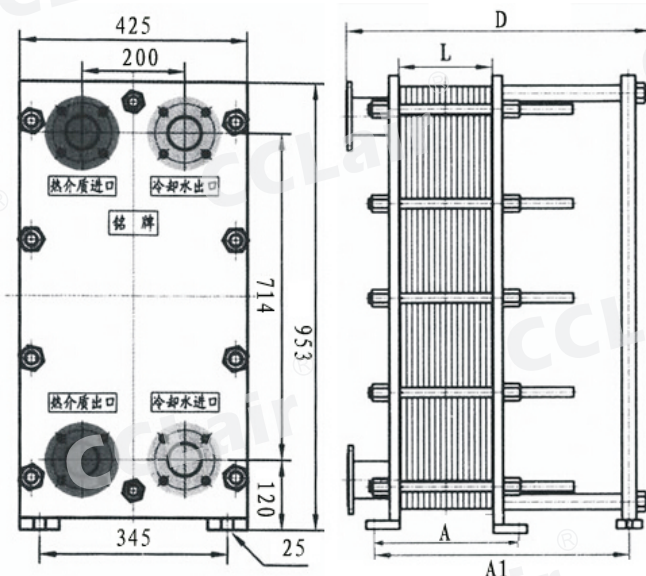

D: 双流时的法兰间距 A1: 为后支撑架式的地脚尺寸

型号	总换热面积 (m <sup>2</sup> )	板片数 (张)	L (mm)	D (mm)	A (mm)	A1 (mm)
BR0.2-5	5	25	100	400	210	425
BR0.2-6	6	30	120	420	230	454
BR0.2-7	7	35	140	440	250	483
BR0.2-8	8	40	160	460	270	512
BR0.2-9	9	45	180	480	290	541
BR0.2-10	10	50	200	500	310	570
BR0.2-12	12	60	240	540	350	628
BR0.2-15	15	75	300	600	410	715
BR0.2-16	16	80	320	620	430	744
BR0.2-18	18	90	360	660	470	802
BR0.2-20	20	100	400	700	510	860
BR0.2-22	22	110	440	740	550	918
BR0.2-24	24	120	480	780	590	976
BR0.2-25	25	125	500	800	610	1005